


Инструкция по установке приложения для ПК на базе Windows

1. Скачайте программу EZStation с сайта производителя
<https://global.uniview.com/ru/Products/Software/PC/EZStation/>

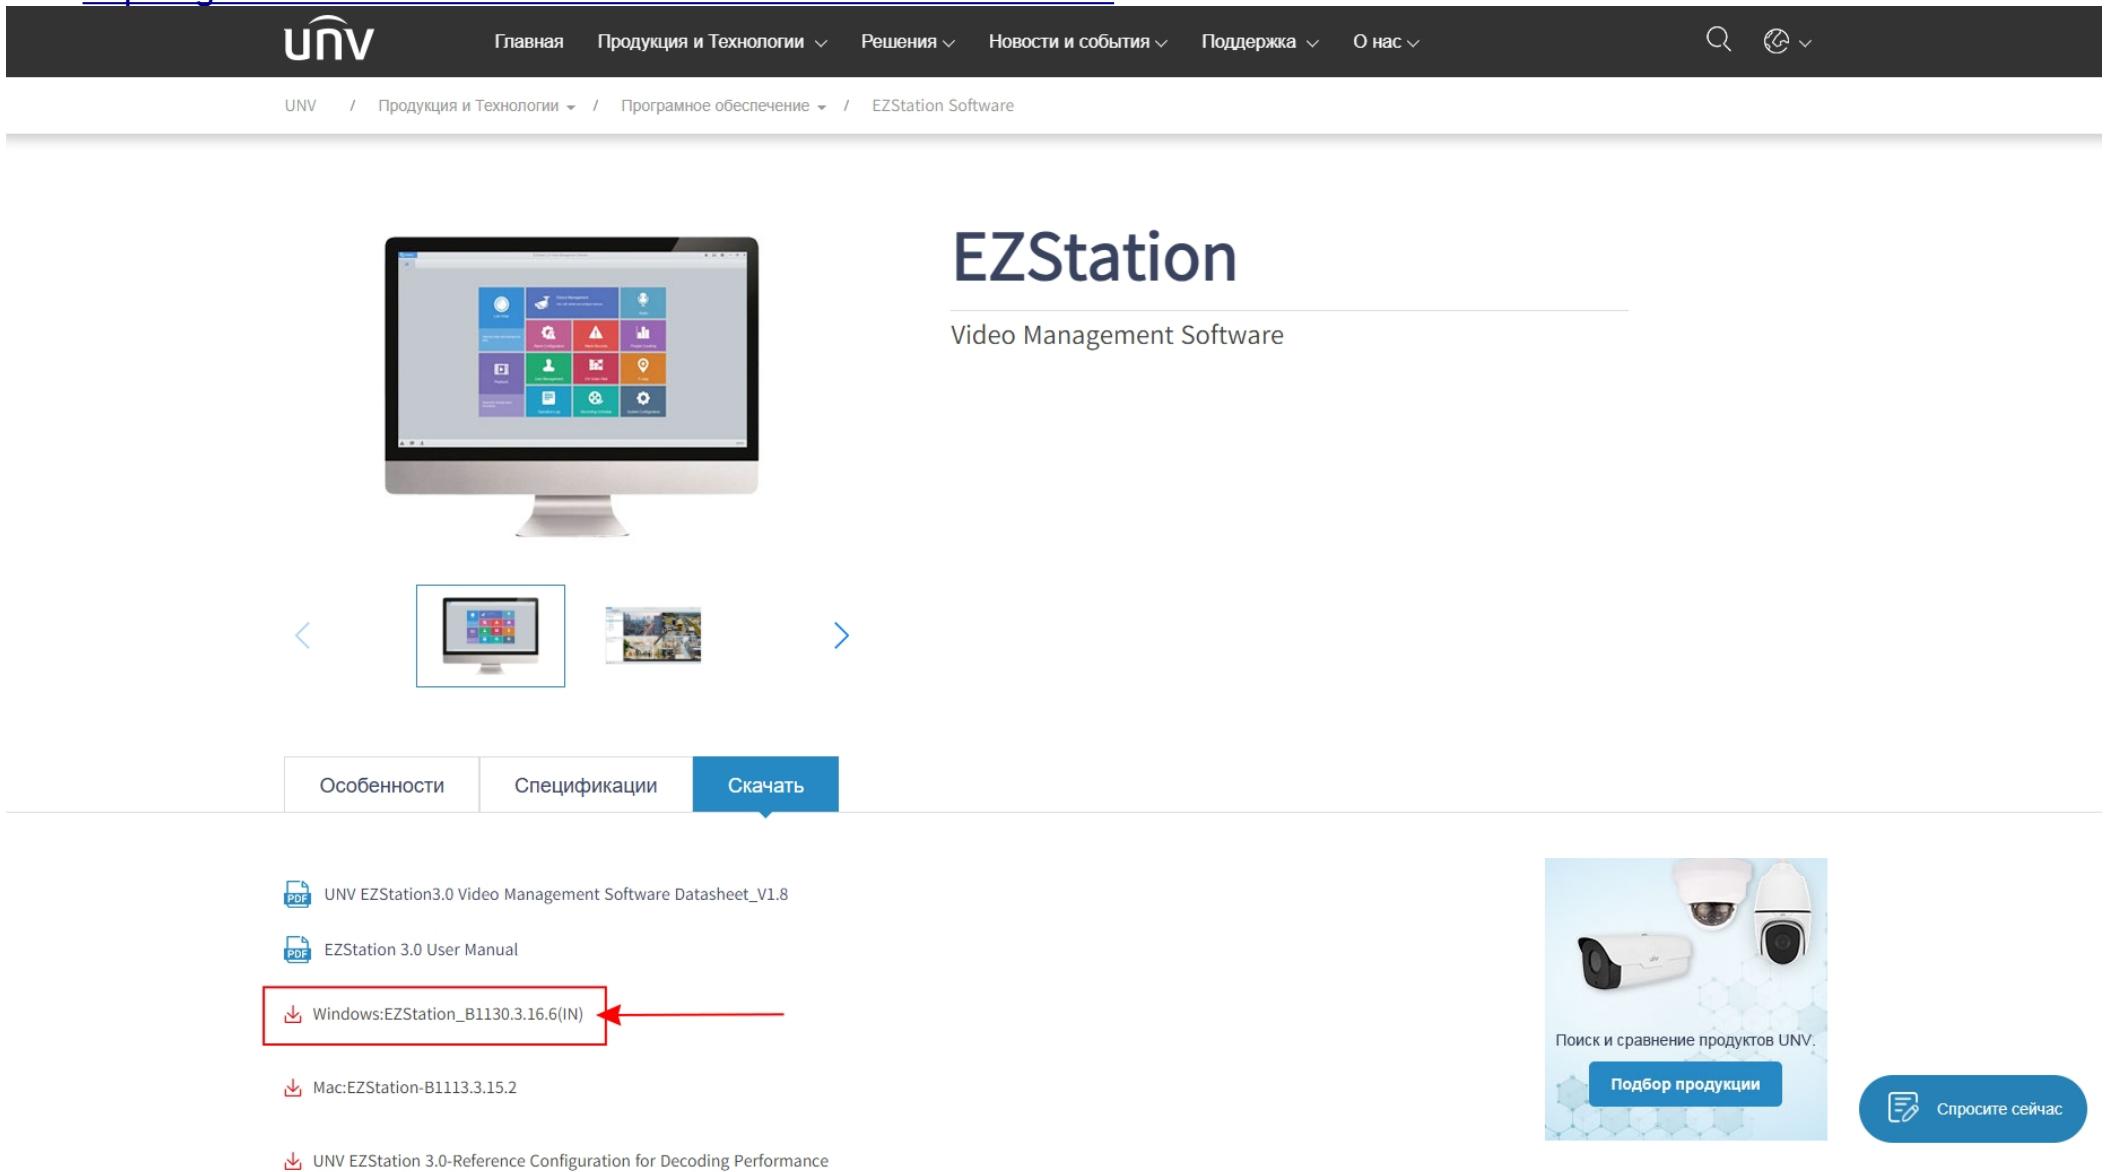

The screenshot shows the UNV (Uniview) website with a dark header bar. The header includes the UNV logo, a search icon, and a user account icon. Below the header, a breadcrumb navigation path shows: UNV / Продукция и Технологии / Программное обеспечение / EZStation Software.

The main content area features a large image of a computer monitor displaying the EZStation software interface, which includes a dashboard with various video feeds and management icons. Below this main image are two smaller thumbnail images of the software interface, with left and right arrows for navigation.

Below the main image, there is a horizontal navigation bar with three tabs: "Особенности" (Features), "Спецификации" (Specifications), and a blue "Скачать" (Download) button. The "Скачать" button is highlighted with a red arrow pointing to it from the bottom left.

Under the download tab, there are several download links:


- [UNV EZStation3.0 Video Management Software Datasheet_V1.8](#)
- [EZStation 3.0 User Manual](#)
- [Windows:EZStation_B1130.3.16.6\(IN\)](#) (This link is highlighted with a red box and a red arrow pointing to it from the bottom left.)
- [Mac:EZStation-B1113.3.15.2](#)
- [UNV EZStation 3.0-Reference Configuration for Decoding Performance](#)

To the right of the download links is a sidebar featuring three surveillance camera images. Below the cameras, text reads "Поиск и сравнение продуктов UNV." and a blue button labeled "Подбор продукции". At the bottom right of the sidebar is a blue button with a pen icon and the text "Спросите сейчас".


2. Нажмите кнопку «Agree» и дождитесь загрузки архива с файлом установки




3. Откройте архив с помощью программы WinRAR или 7zip и запустите файл установки

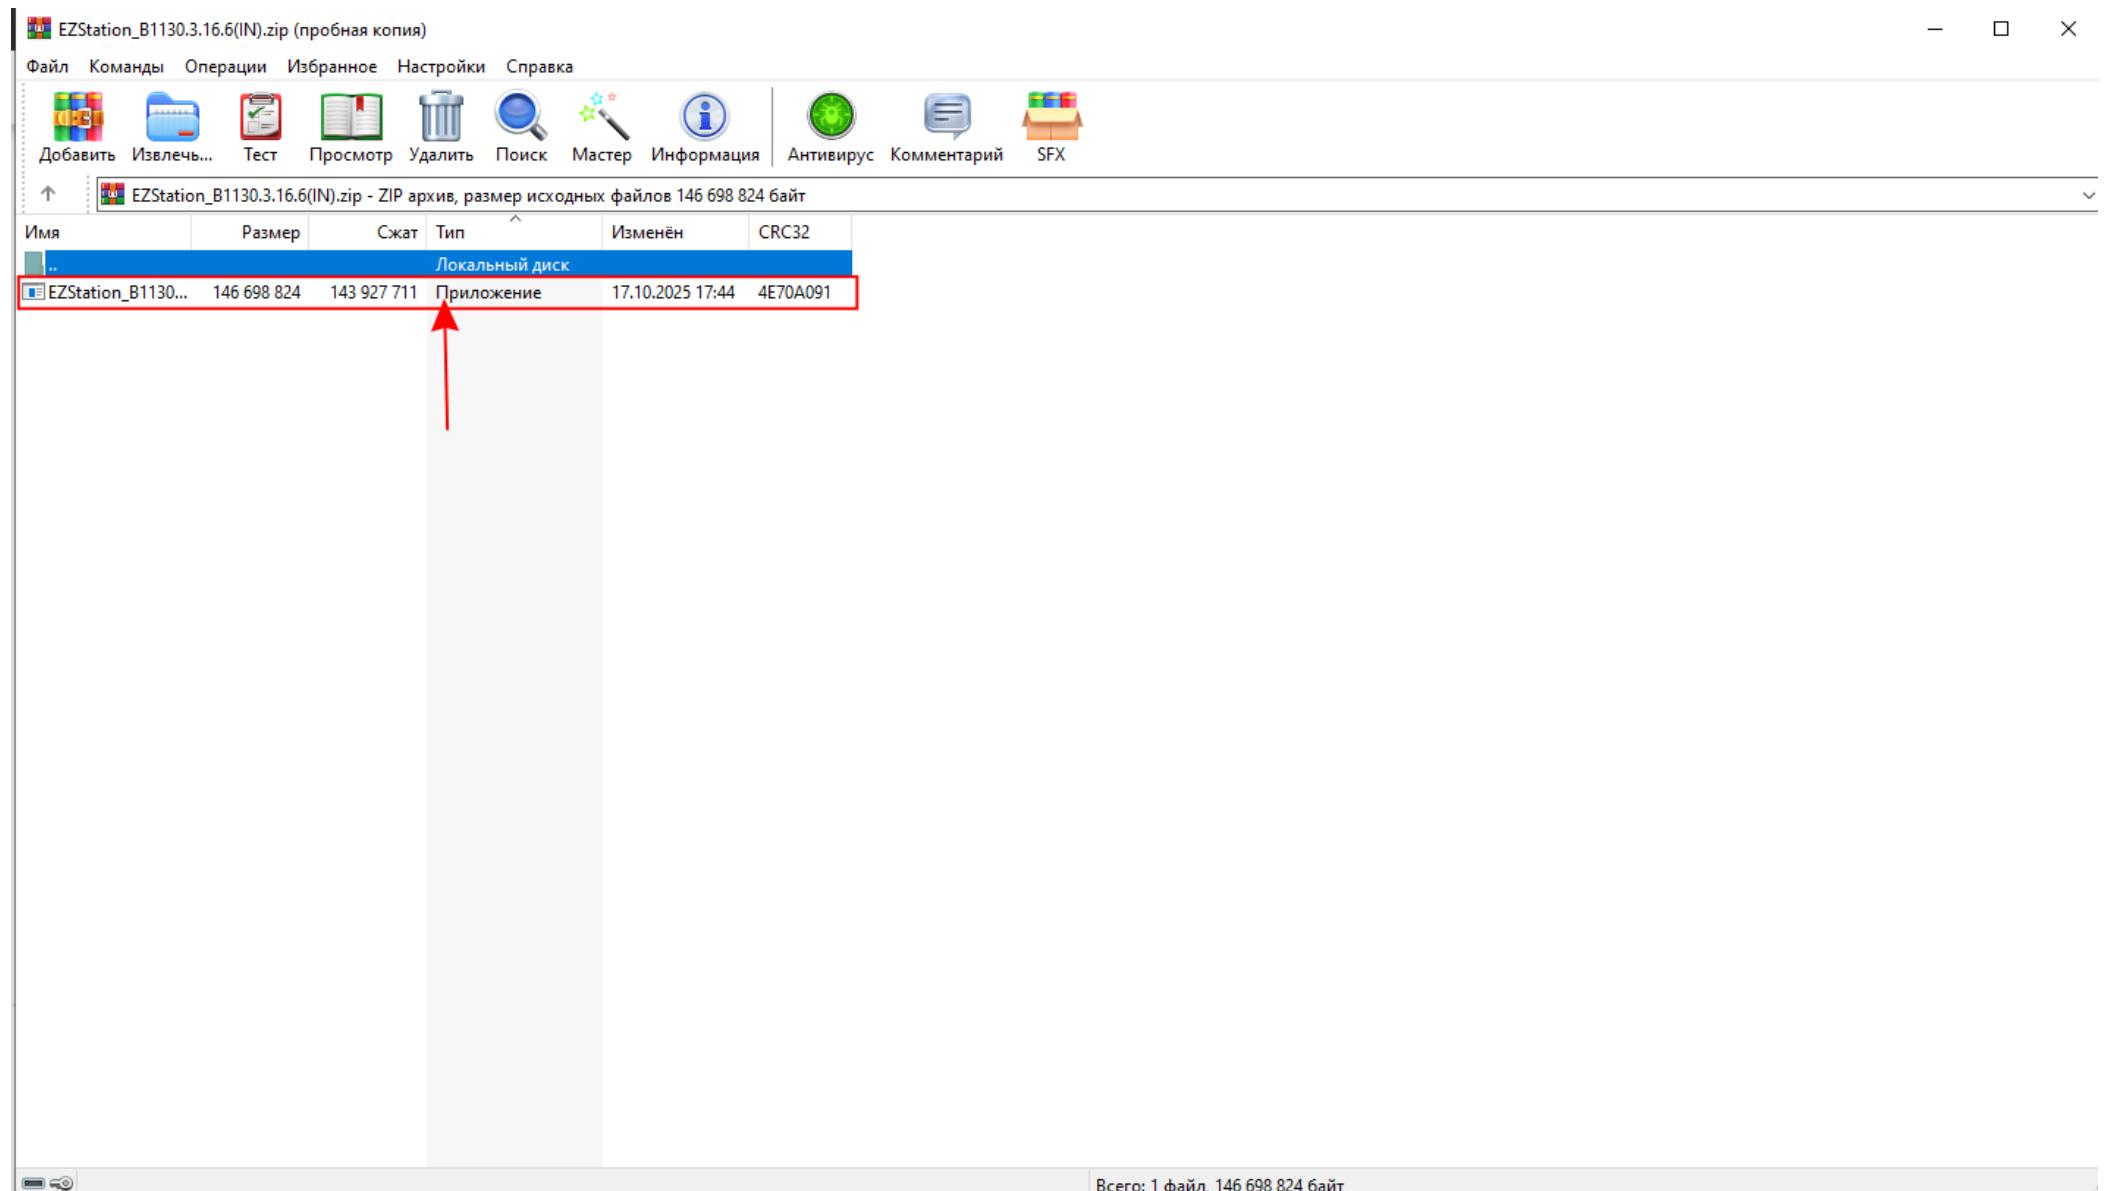


4. Нажмите кнопку «Next», чтобы начать процесс установки

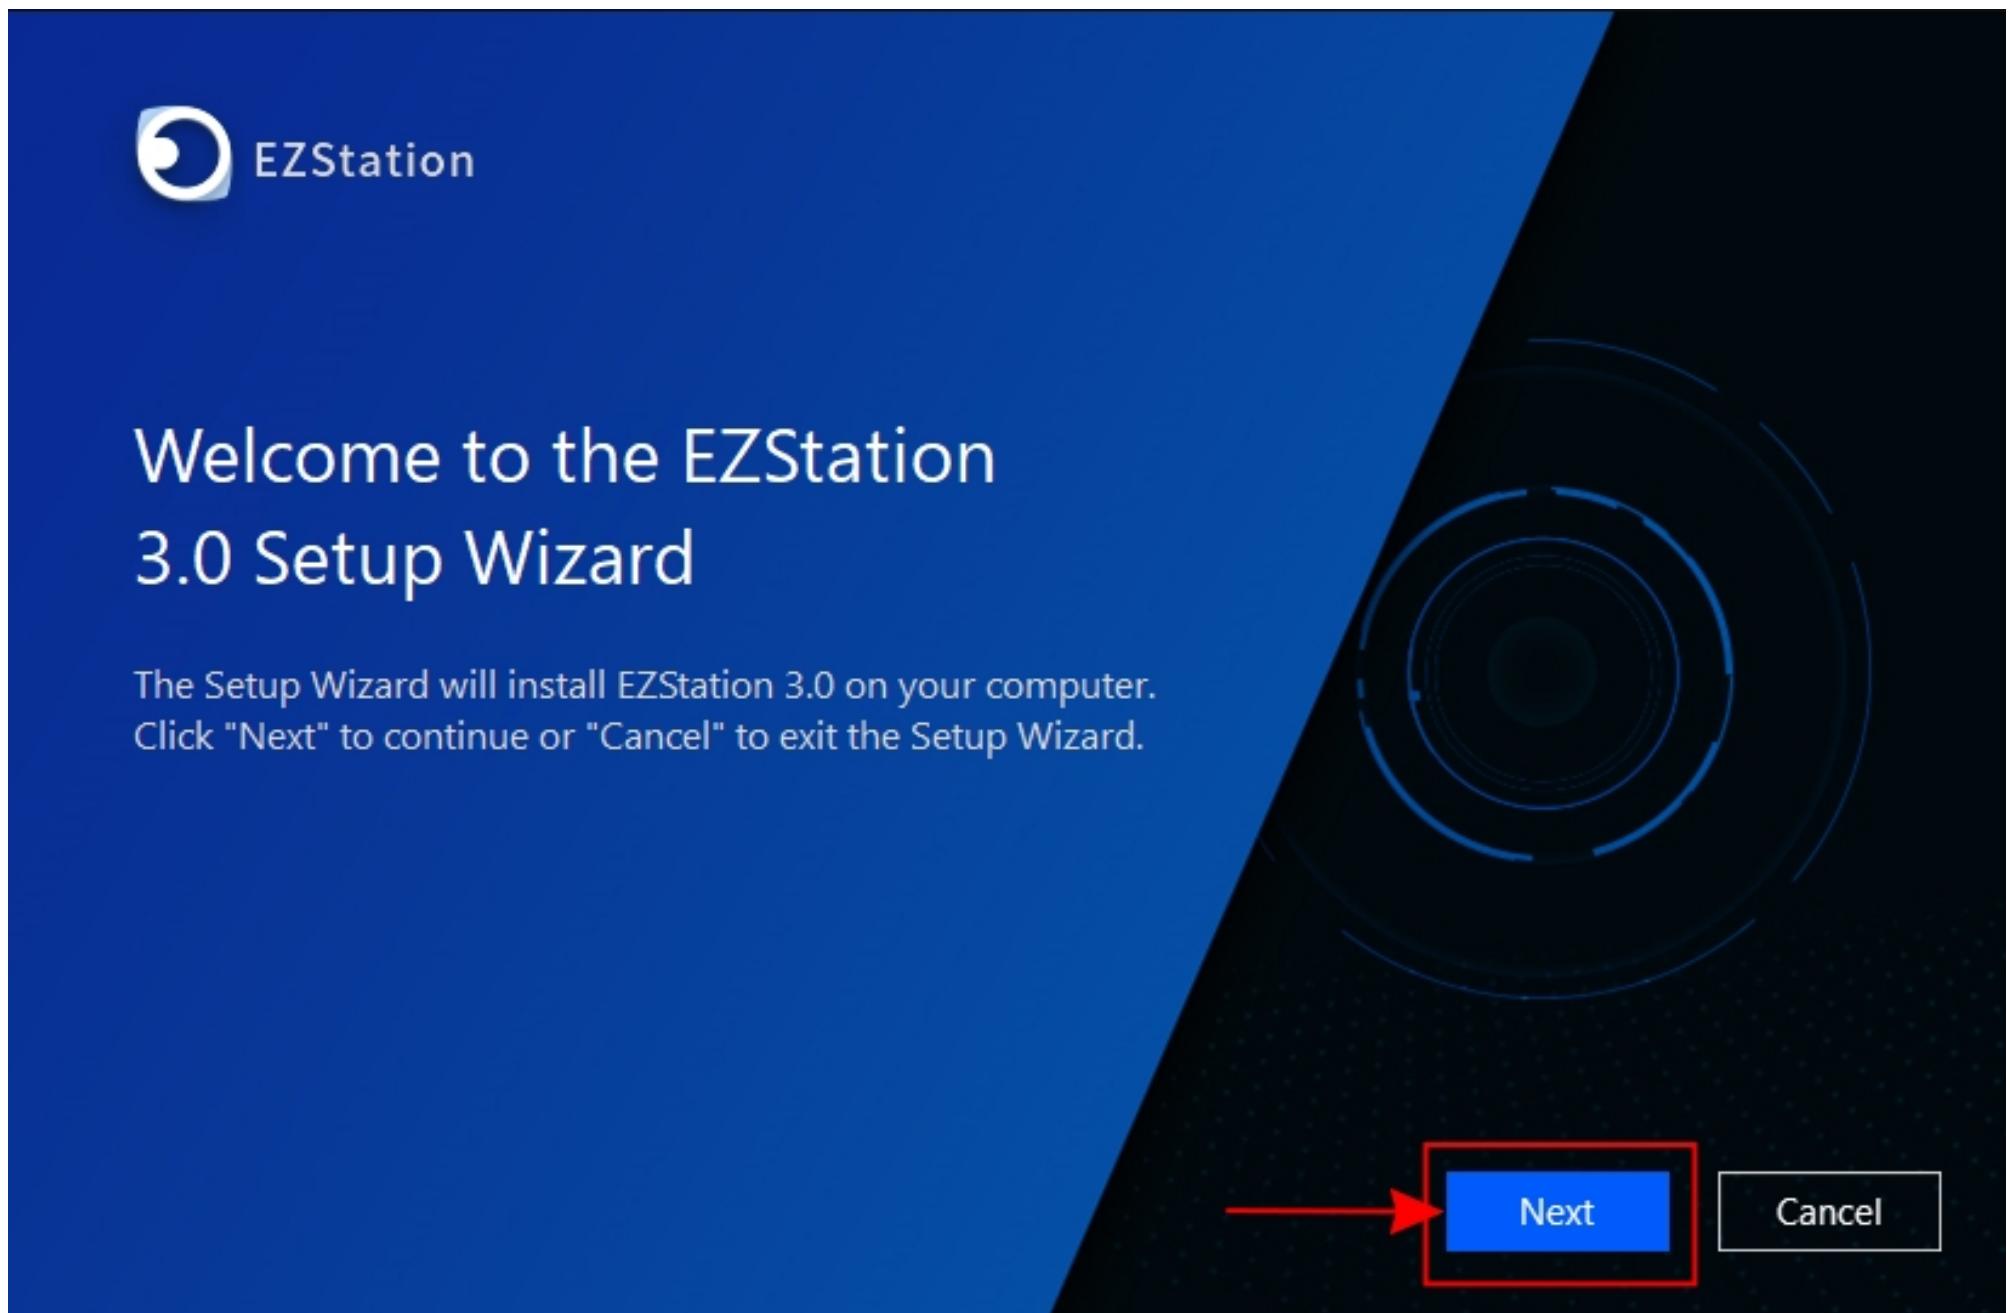

5. Выберите путь установки приложения, либо оставьте «По умолчанию» и нажмите «Next»

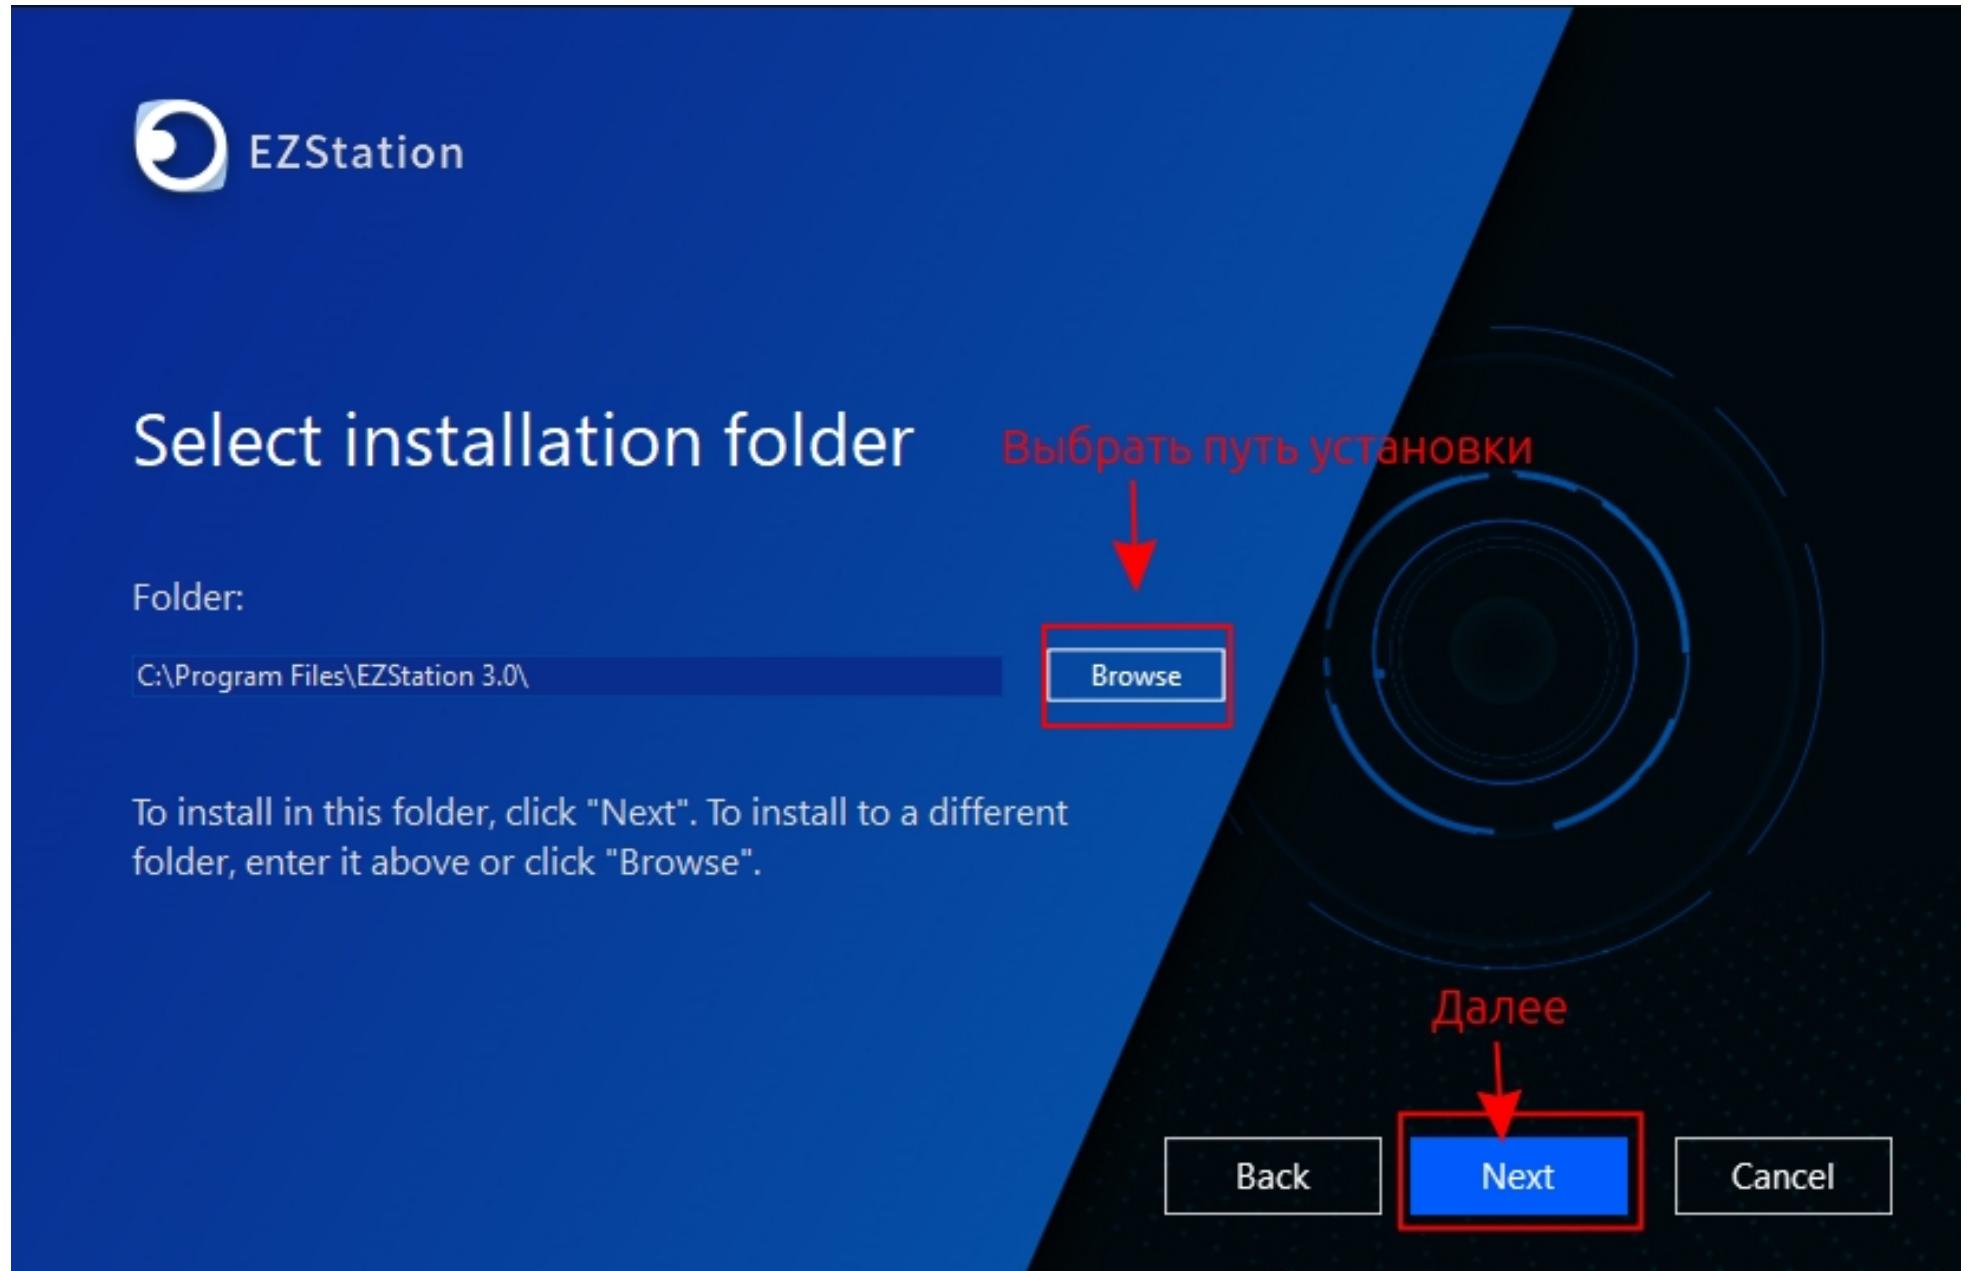


6. Нажмите «Install» и дождитесь окончания процесса установки

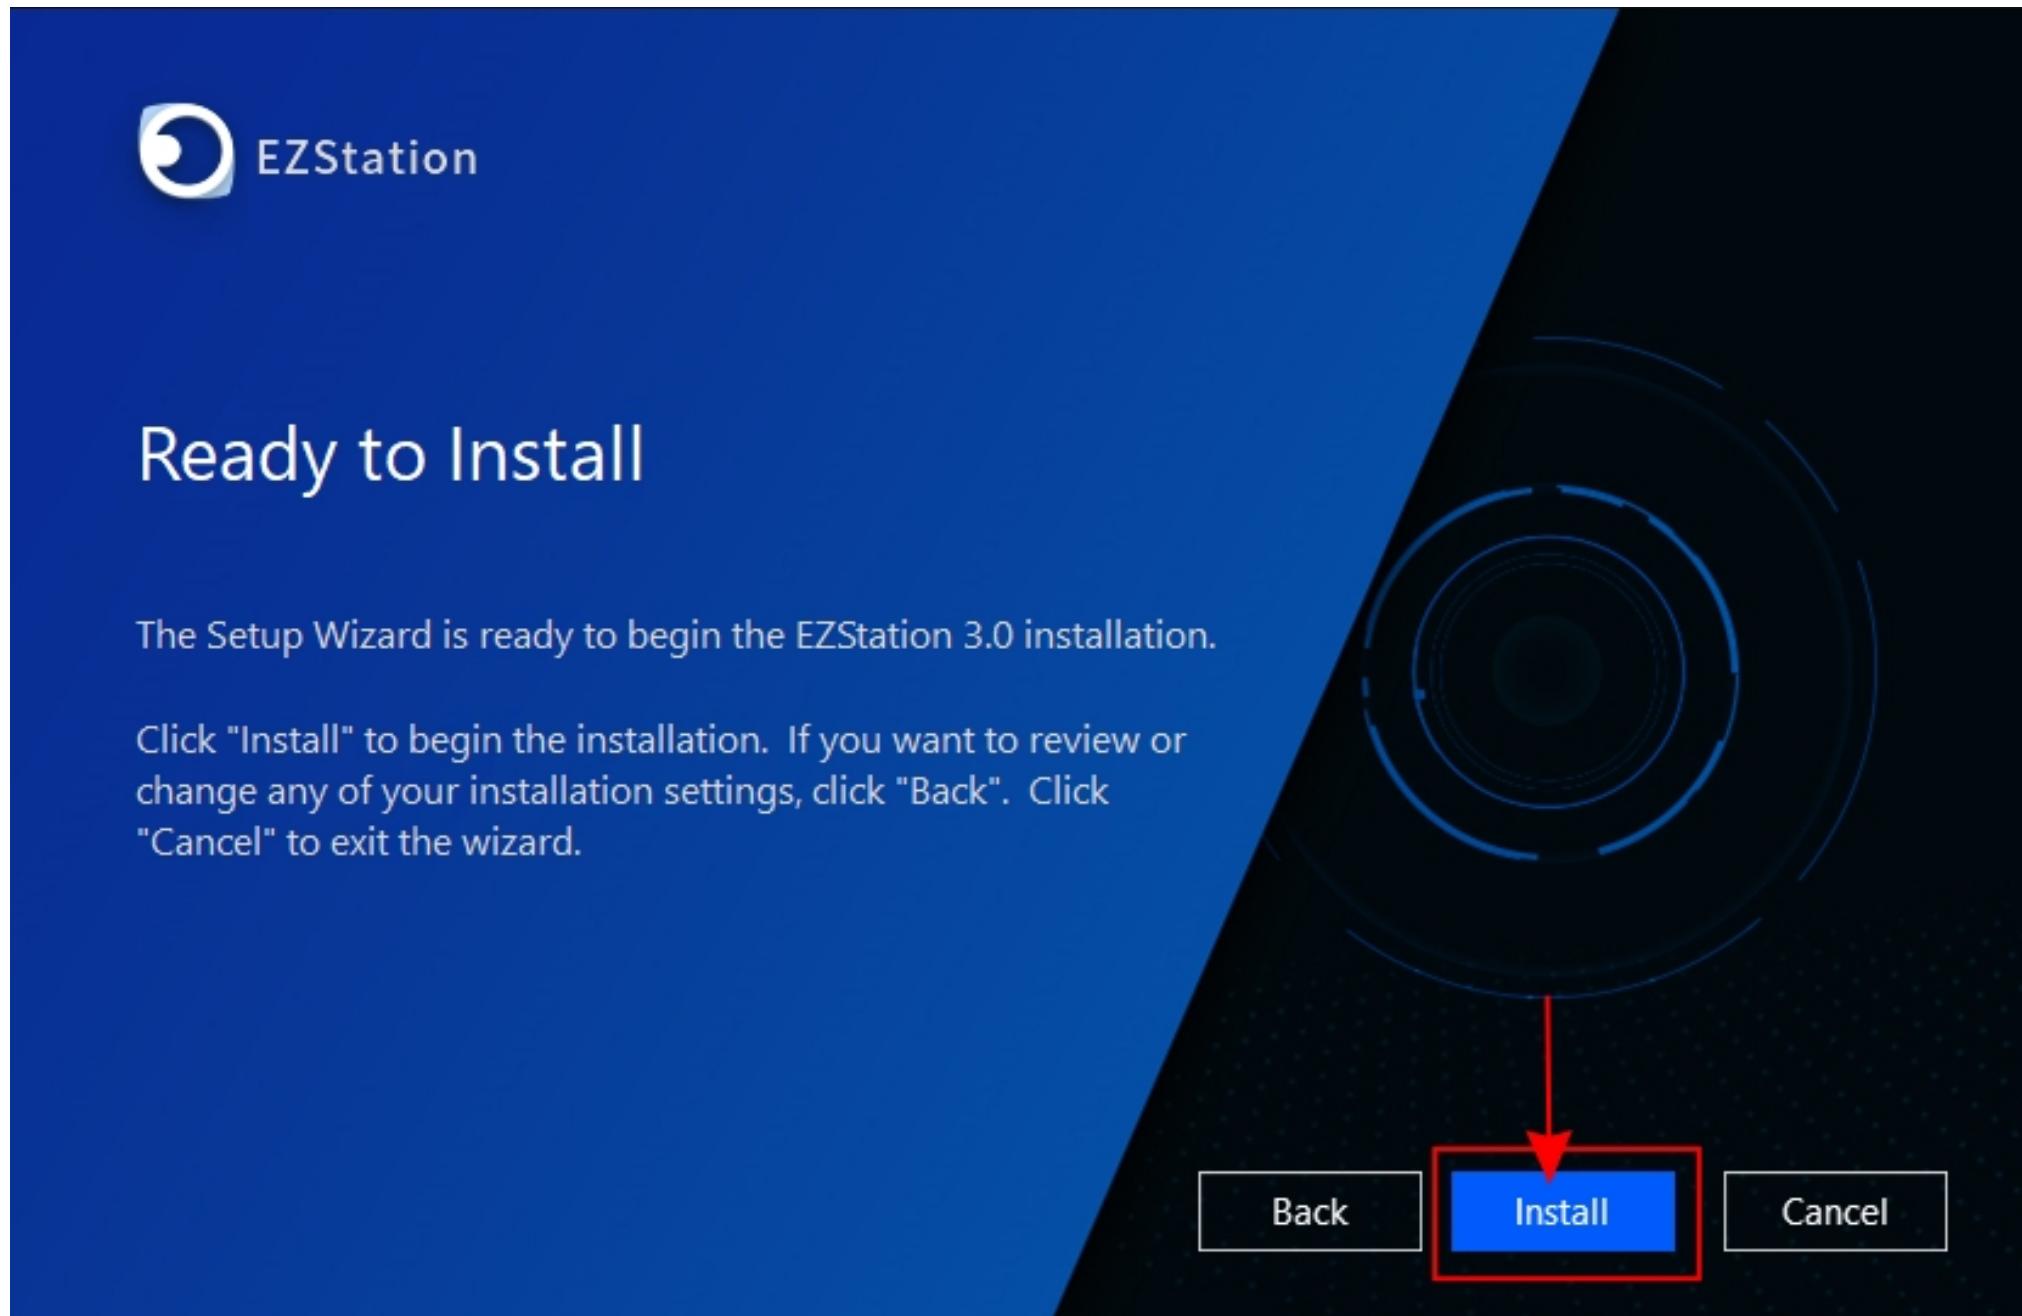

7. После окончания установки, нажмите кнопку «Finish», чтобы выйти из менеджера установки



8. Приложение появится на Рабочем столе. Найдите его и запустите. В открывшемся окне нужно будет придумать Логин и Пароль для входа в приложение. Данный логин и пароль защищает от несанкционированного доступа к приложению третьих лиц. После ввода данных, нажмите «Next»

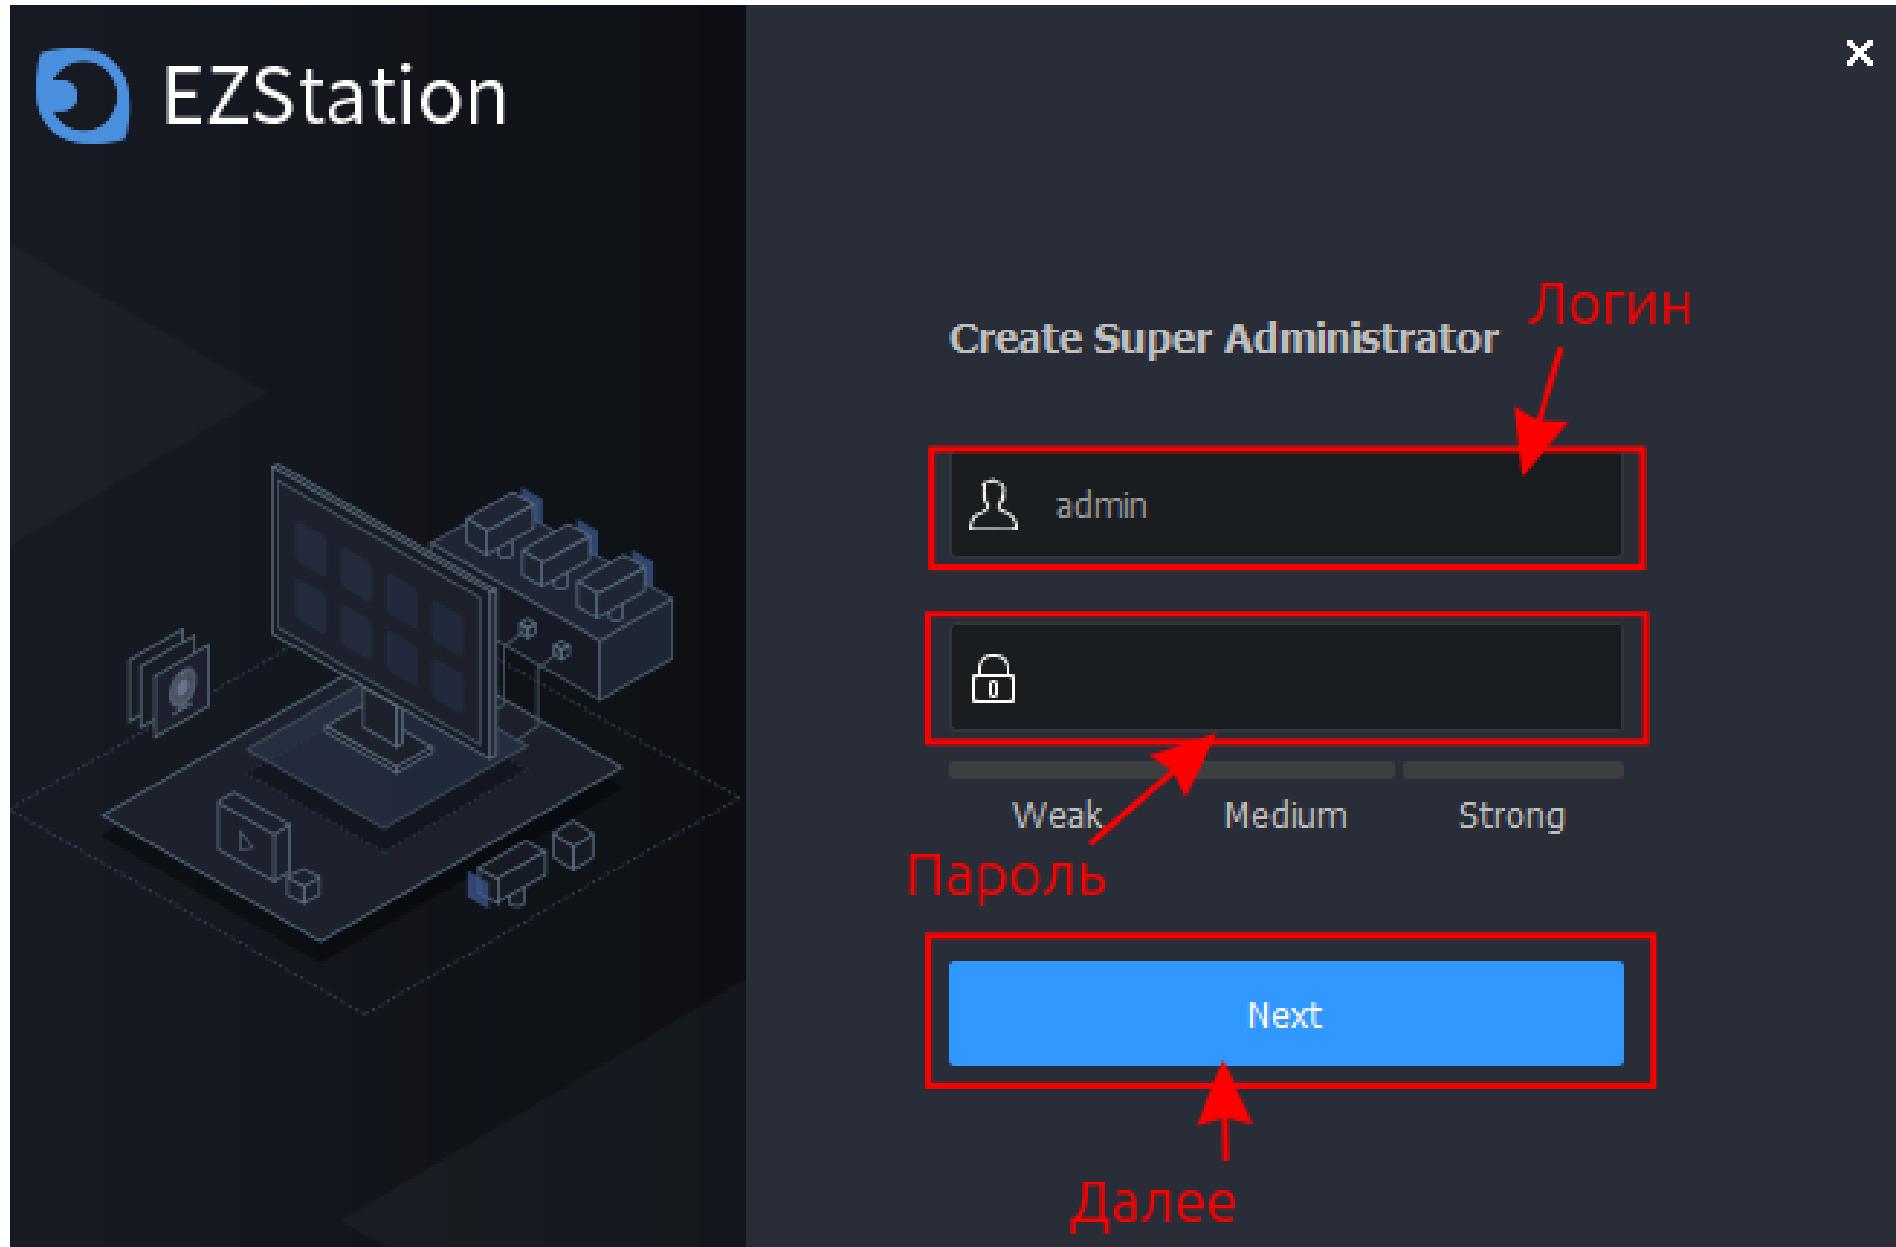

9. Выберите пункт «Device Management»

Screenshot of the EZStation Control Panel interface.


The main menu includes:

- Common:
 - Live View
 - Playback
 - Video Wall
 - Audio
 - E-map
 - People Counting
 - Alarm Records
 - Device Management
 - Face Recognition
- Basic:
 - View
 - Alarm Configuration
 - System Configuration
 - Sequence Resource
 - User Management
 - Recording Schedule
 - Operation Log
- Smart


A red box highlights the "Device Management" option under the Common section, indicating it is the selected item.

Bottom navigation bar icons include: warning, lightning bolt, download, and settings.

10. Нажмите «+ Add», чтобы добавить новое устройство

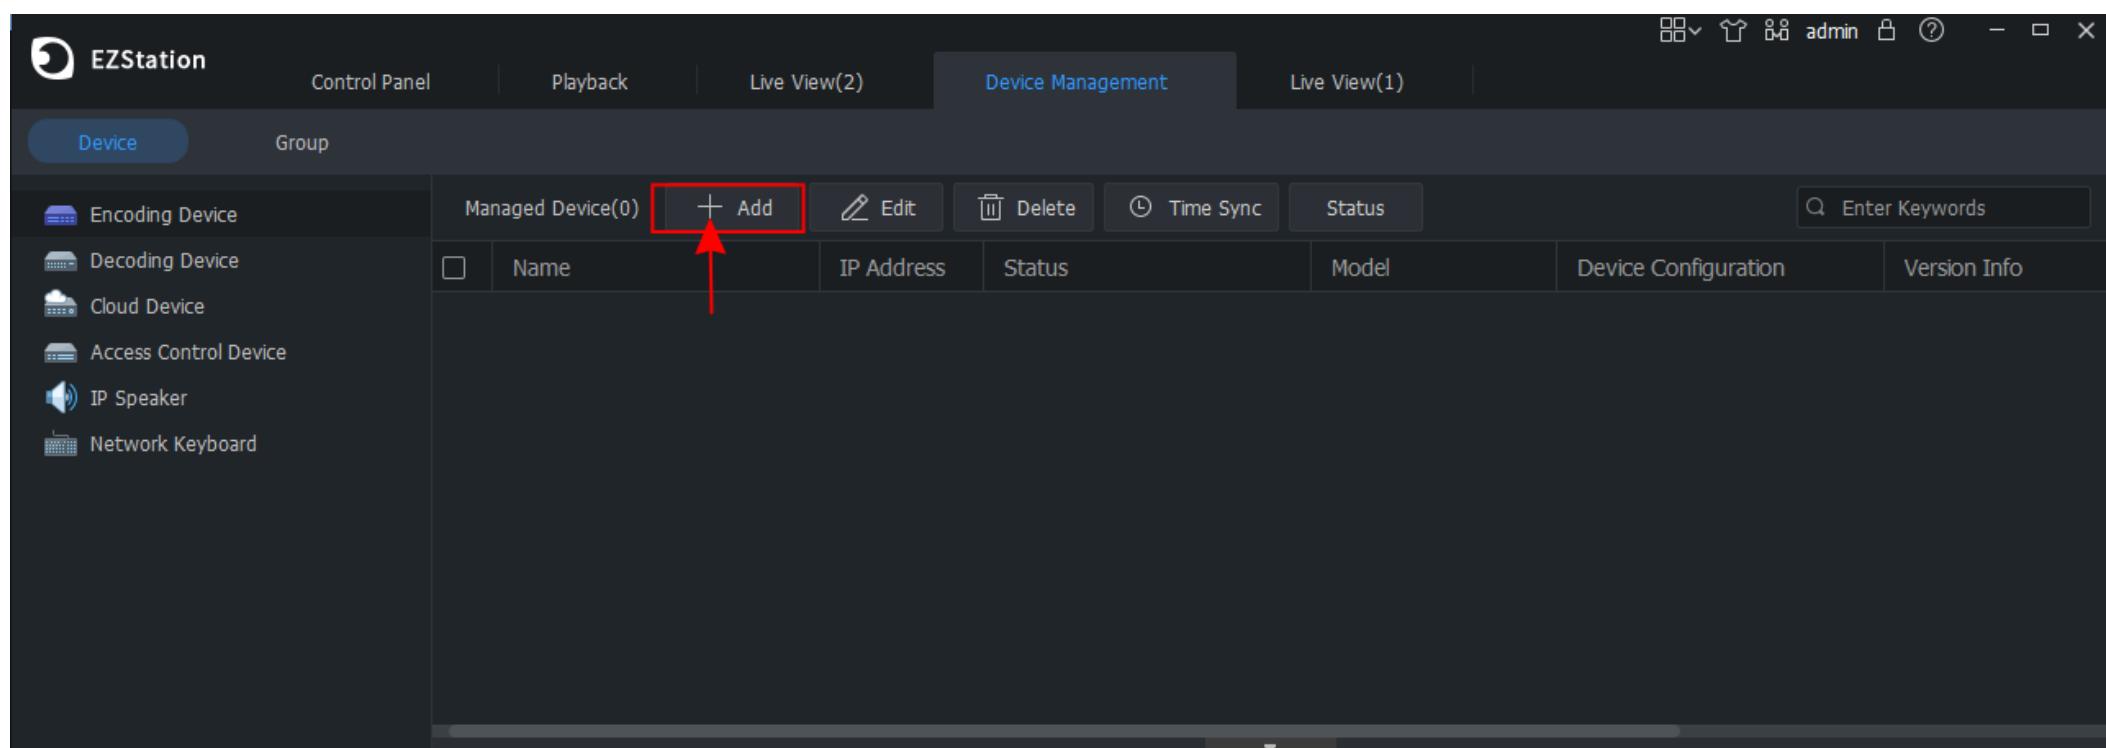

11. Введите название камеры и данные из памятки пользователя (Адрес сервера, логин и пароль)

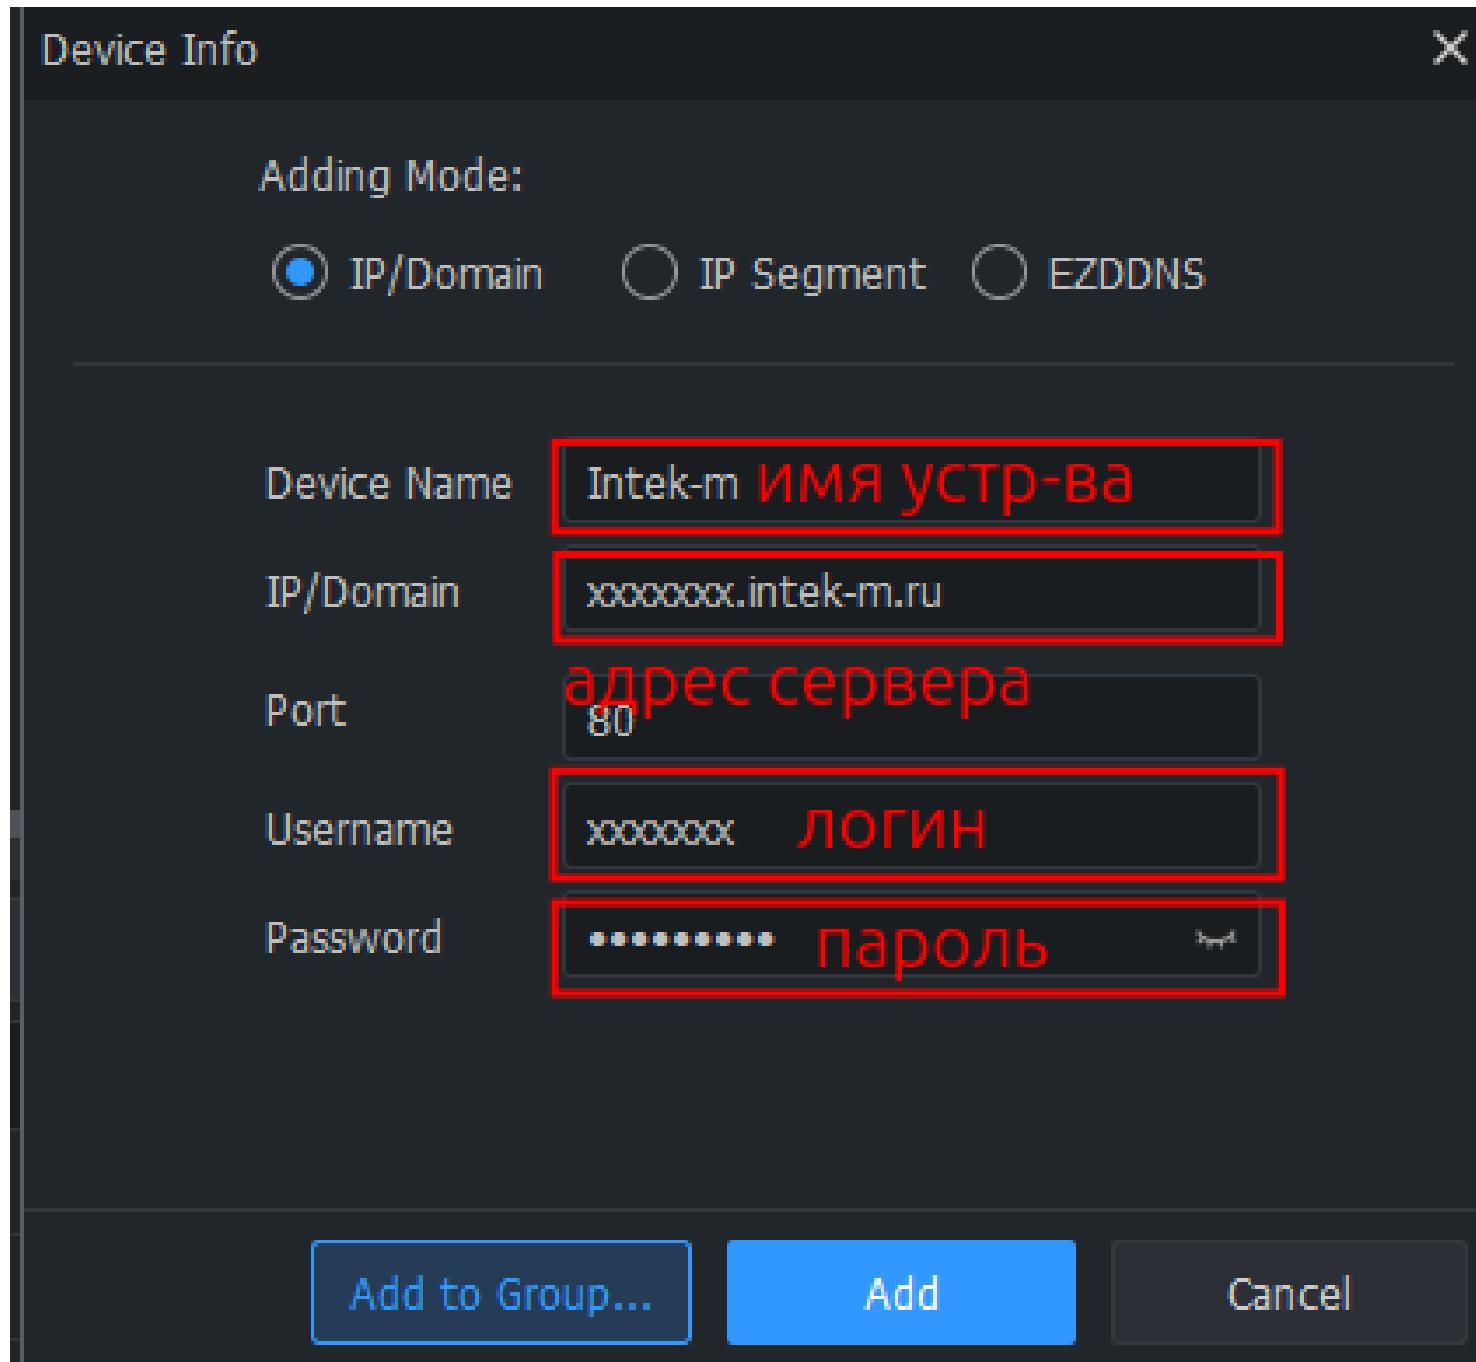


12. Вернитесь в «Control Panel» и выберите «Live View» для просмотра камеры в режиме реального времени

The screenshot shows the EZStation Control Panel window. At the top left is the EZStation logo and the title "Control Panel". The top right contains standard window control icons. The main area is divided into several sections:


- Common** section:
 - Live View**: Represented by a camera icon. A red box highlights this item. Description: "View live video and manage live view."
 - Audio**: Represented by a microphone icon. Description: "Two-way audio and broadcast."
 - Alarm Records**: Represented by a red alarm icon. Description: "View alarms in real time when any exception occurs."
- Basic** section:
 - View**: Represented by a monitor icon.
 - Alarm Configuration**: Represented by a gear icon.
 - System Configuration**: Represented by a gear icon.
 - Sequence Resource**: Represented by a monitor with a graph icon.
 - User Management**: Represented by two people icons.
 - Recording Schedule**: Represented by a circular icon with three dots.
 - Operation Log**: Represented by a document icon.
- Smart** section (partially visible):
 - Face Recognition**: Represented by a person icon.

At the bottom are several small status icons: a warning triangle, a lightning bolt, a download arrow, and a clipboard.

13. Если камера не отображается, увеличьте размер сетки, либо найдите канал с названием Вашей камеры слева в списке. Нажмите дважды по изображению, чтобы увеличить его

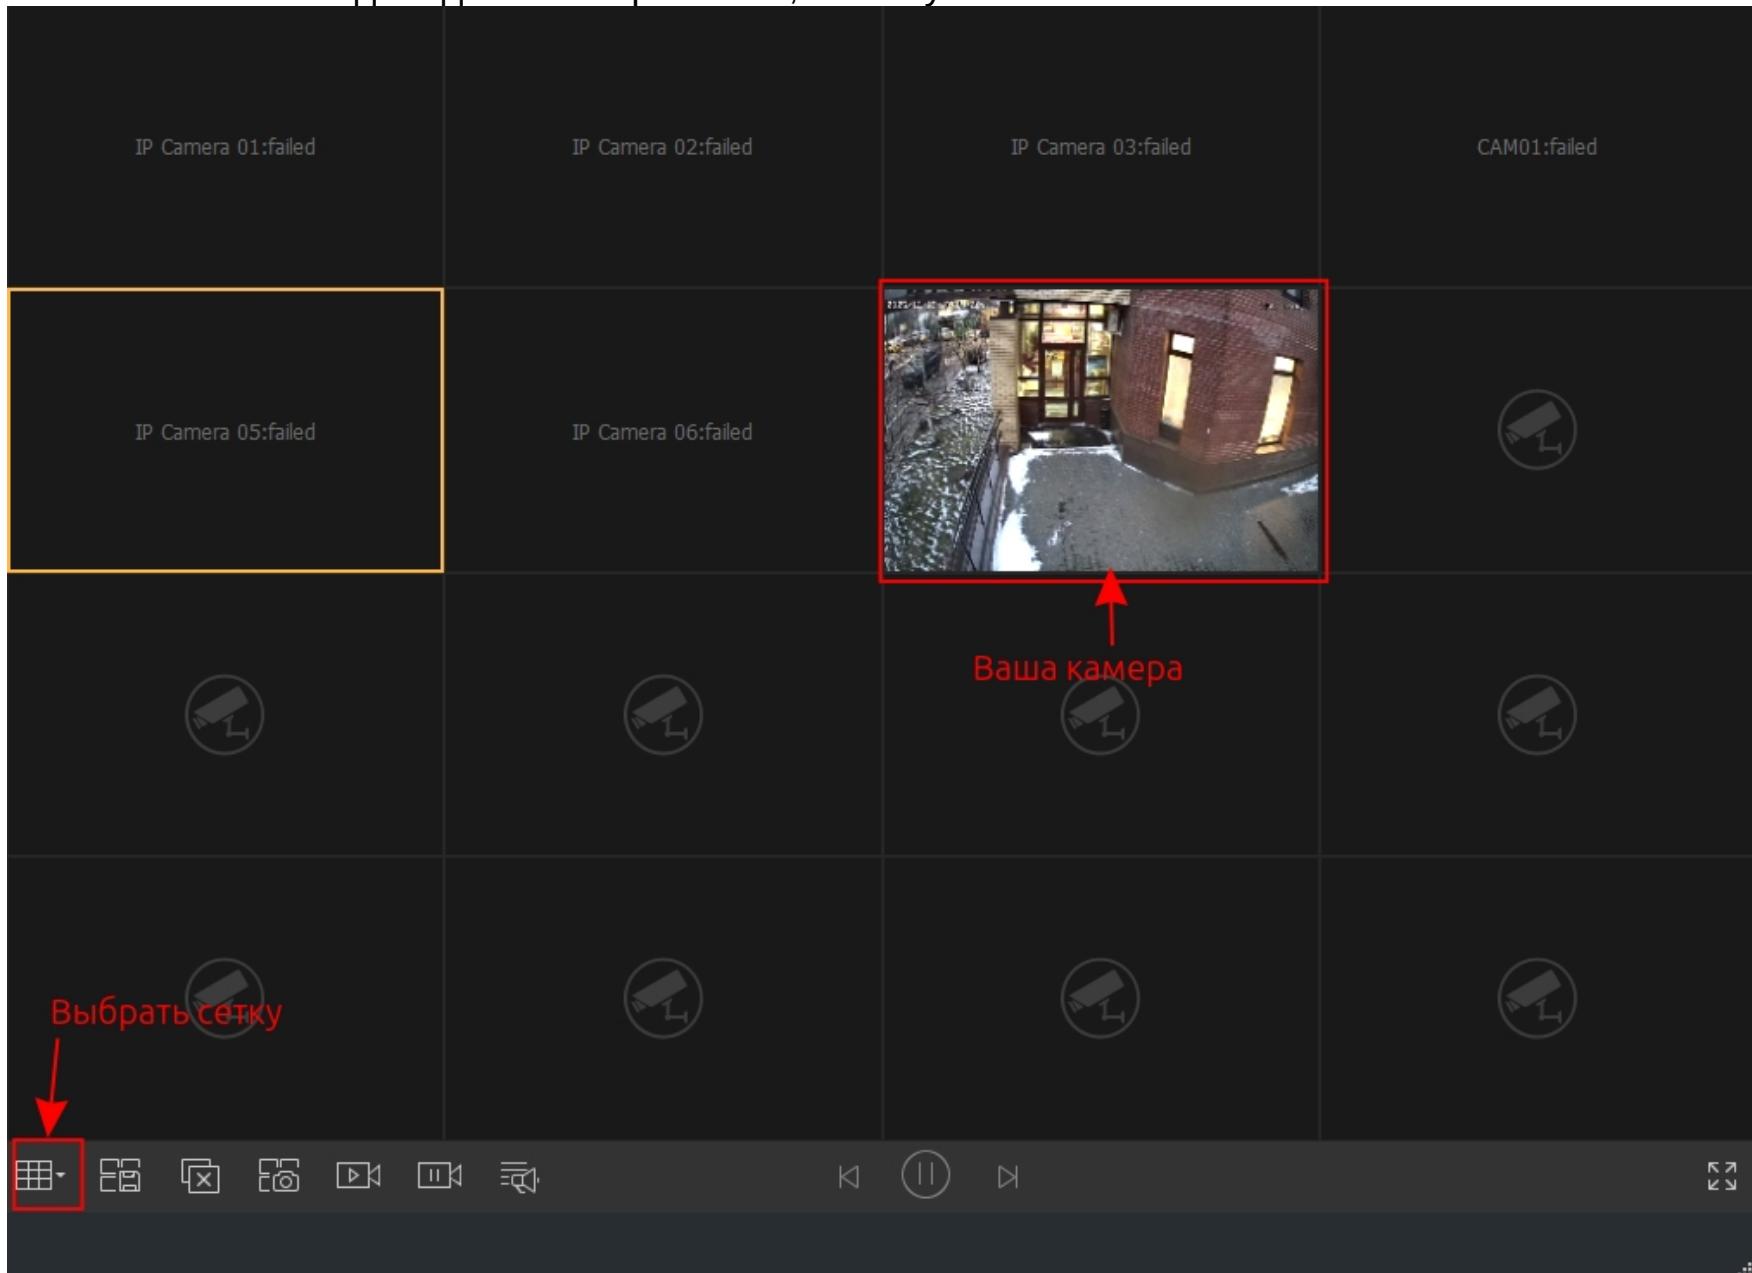

14. Чтобы перейти к просмотру архива камеры, вернитесь в «Control Panel» и выберите пункт «Playback»

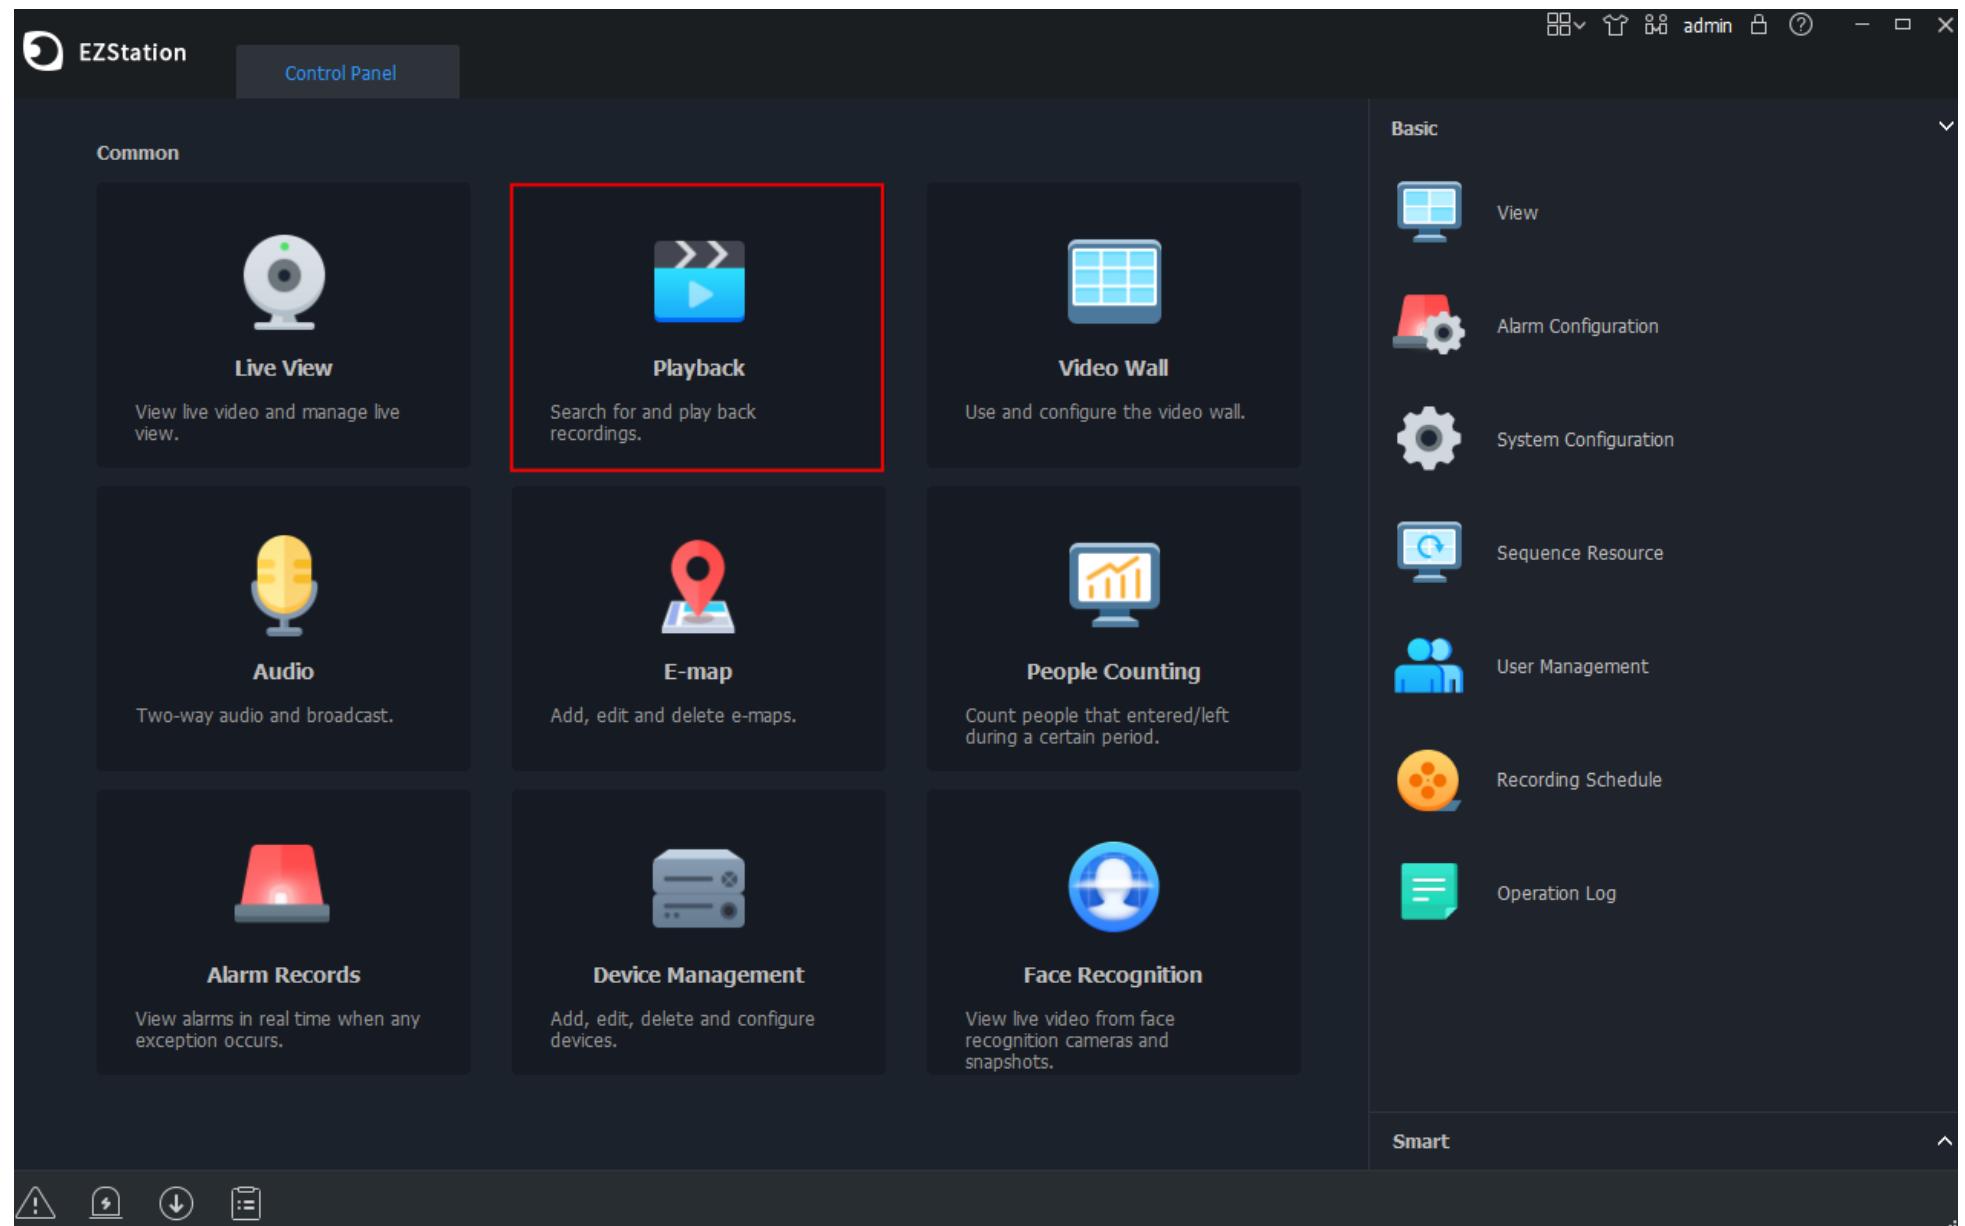

15. Для просмотра архива в нижнем левом углу нужно выбрать нужную дату и нажать кнопку «Search». После этого под изображением появится шкала времени, в которой можно найти интересующие временные интервалы

